

# Directions for installing and using spa cover remover models:

**SPA**Accessories




Canadian Patent #2,155,988



US Patent #5,471,685

## To install:

1

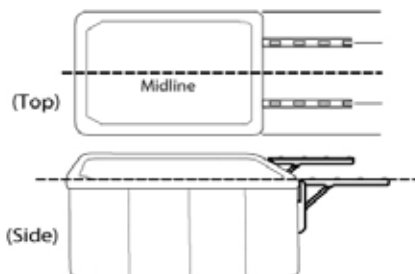


Position one roller rack so:

- (1) it is halfway between the spa edge and the midline;
- (2) its top surface is flush with the top of the spa.

Mark the position of the rack's 6 screw holes in the skirt.

Repeat this procedure locating the other roller rack on the opposite side of the midline.

2

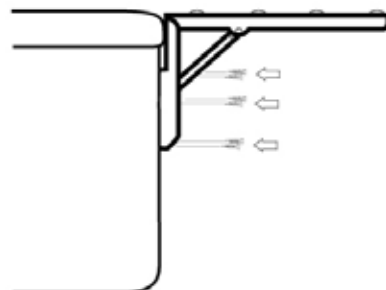


Secure each roller rack to the spa skirt by inserting all six #10 screws tightly into the screw holes that you marked in the previous step.

### NOTE:

If your spa cover is heavy, it is probably saturated with water. Water-saturated foamed -filled covers have very little insulating 'R' value and their excess weight will damage the roller system. If your cover is water saturated, you must replace the foam insert.


## To use:

1

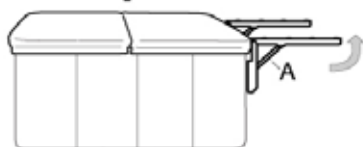


Lock each of the 2 roller racks into position by rotating counter-clockwise, then securing the bottom edge (A) of the brace. Note: Do not bend the roller rack arm more than 90° upward, or damage to the joint may result.

2



Flip one cover half over the other and push the spa cover on top of the roller racks. Now, enjoy your spa!

3



When done, push the folded spa cover back over the spa, then flip the upside half back onto the spa. Release the braces & rotate each roller rack clockwise to the rest position.

### CAUTION:

- Do not sit on open cover: DAMAGE WILL RESULT.
- Do not mount roller racks on the front or the equipment side of spa: DAMAGE WILL RESULT.
- Do not twist or move roller racks sideways: DAMAGE WILL RESULT.
- Do not allow weight resting on the roller system to exceed 75 lbs: DAMAGE WILL RESULT.
- For safety reasons, the roller system should be secured in the lowered position after each use.
- If there is snow on the cover, remove all snow before opening or DAMAGE WILL RESULT.